


LAYING THE CURVED FINISH EAVE


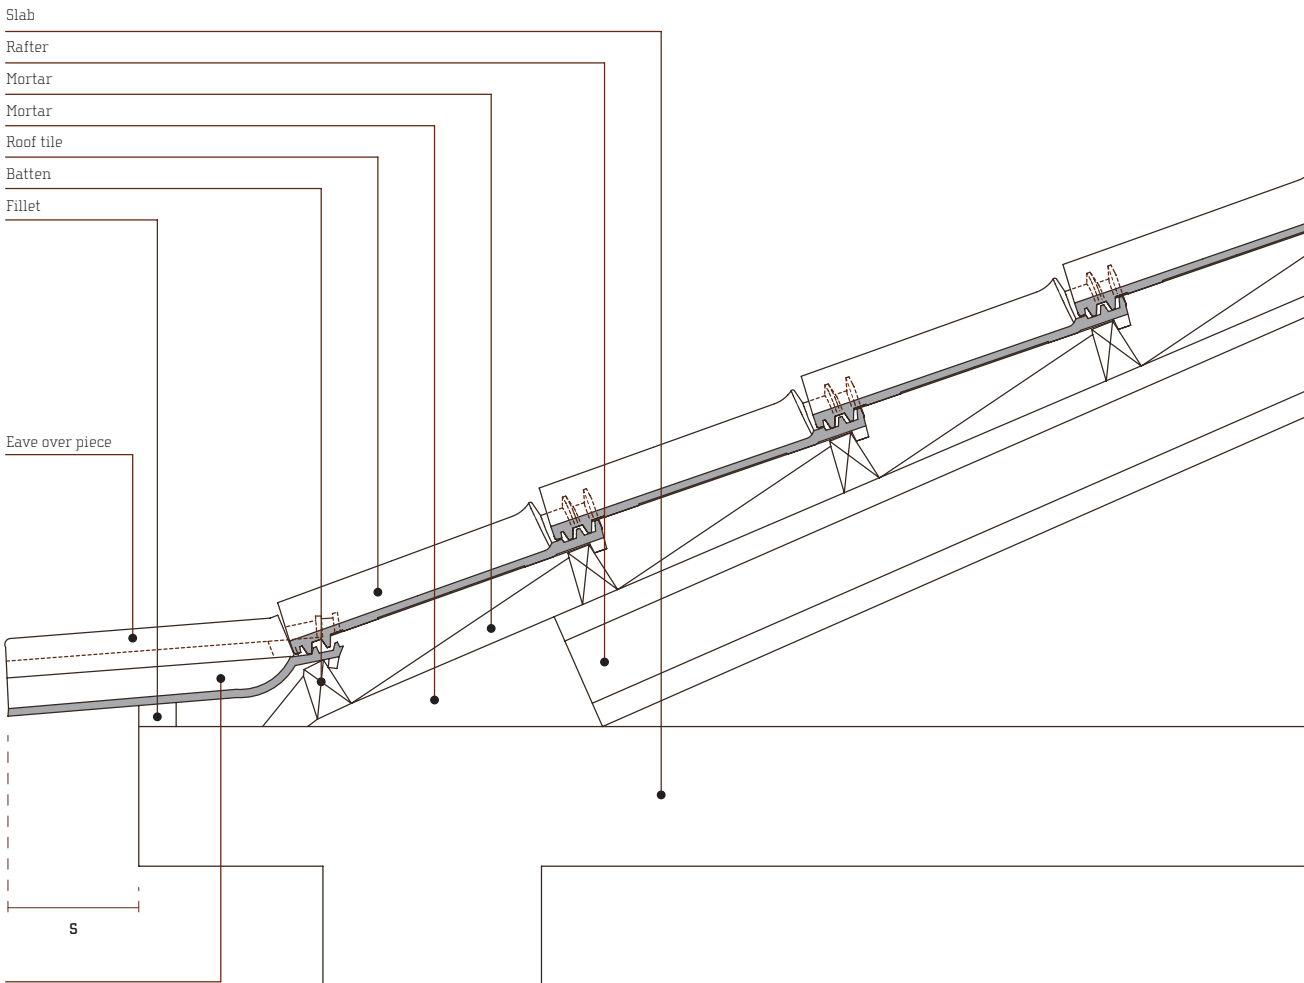


**Eave under piece 40**  
With a minimum pitch of 5°.  
Projection between 18 and 20 cm.

**Eave under piece 49**  
(Curved finish eave 49)  
With a minimum pitch of 5°.  
Projection between 24 and 26 cm.

a	Tile F2	Tile F3	Tile F3 White	Tile Tecno
Máx.	84 cm	83,8 cm	82 cm	84 cm
Mín.	82 cm	81 cm	79,5 cm	83 cm

Note: The measures presented in this table are approximate values.

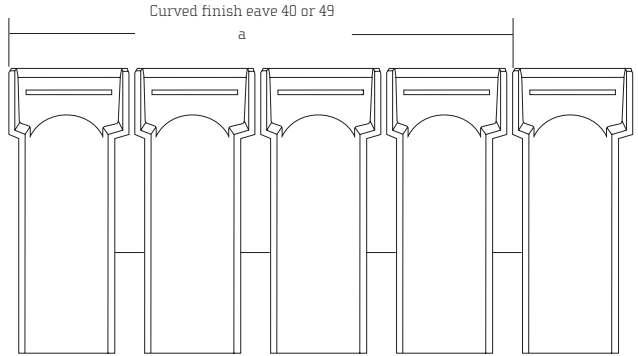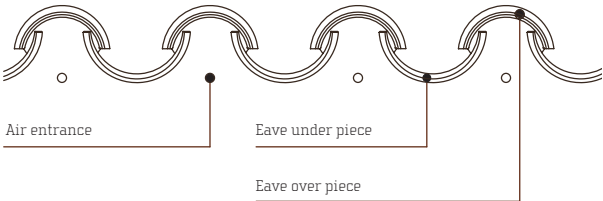

Firstly, the measure expected to be projected beyond the wall, must be marked on the pieces which will be placed along the entire perimeter of the roof. To enable the alignment of the pieces, the eave under piece is placed, at the cyma limit, on a fillet of mortar.

The first row of roof tiles set on the eave over tiles should be placed as indicated in the drawing. The air entrance at this curved finish eave may be ensured making small holes in the mortar between the eave under pieces. Use the minimum possible amount of mortar to fix the eave under and over pieces.